NOTES:

1. ALL PLANTING AND IRRIGATION SHALL CONFORM TO THE CITY OF WILDOMAR ORDINANCES AND STANDARDS.
2. AN IRRIGATION SYSTEM SHALL BE UTILIZED FOR THIS PROJECT PER THE CITY OF WILDOMAR'S WATER CONSERVATION ORDINANCE.
3. ALL MATURE PLANTING SHALL NOT INTERFERE WITH UTILITY LINES OR TRAFFIC SITE LINES.
4. ALL UTILITIES SHALL BE SCREENED W/ PLANTING TYP.
5. ALL PARKS SHALL BE MAINTAINED BY THE H.O.A.
6. ALL SLOPES 3' IN VERTICAL HEIGHT & STEEPER THAN 4 TO 1 SHALL BE PLANTED WITH A COMBINATION OF GROUNDCOVER SHRUBS, AND TREES SELECTED FROM THE PLANT LIST OR AS APPROVED BY THE CITY LANDSCAPE ARCHITECT.
6. LOCATE ALL MONUMENT SIGNS & TREES TO NOT INTERFERE W/ TRAFFIC SITE LINES.
7. ALL WATER AND DRAINAGE EASEMENTS SHALL BE PLANTED PER THE JURISDICTION'S REQUIREMENTS.
8. ALL DISTURBED OPEN SPACE AREAS SHALL BE PLANTED PER CITY REQUIREMENTS.

PLANTING LEGEND

SYMBOL	ABBREVIATION	BOTANICAL NAME	COMMON NAME	SIZE	NUMBER	REMARKS– ALL SLOPE TREES SHALL BE 15 GALLON	WATER USE
	TREES:						
	QUE. ENG.	QUERCUS ENGELMANNII	ENGELMAN OAK	15G./24"B.	306	DOUBLE STAKE / HGHT 7–8'/8–10',SPR. 2–3'/3'–4'MIN.	L
	ARB. MAR.	ARBUTUS MARINA	ARBUTUS	24" BOX	62	DOUBLE STAKE / HEIGHT 8–10' , SPREAD 3'–4' MIN.	L
	CHI. TAS.	CHITALPA TASHKENTENSIS	FLOWERING CHITALPA	15G./24"B.	327	DOUBLE STAKE / HGHT 7–8'/8–10',SPR. 2–3'/3'–4'MIN.	L
	CER. OCC.	CERCIS OCCIDENTALIS	WESTERN RED BUD	15G./24"B.	203	DOUBLE STAKE / HGHT 7–8'/8–10',SPR. 2–3'/3'–4'MIN.	L
	PLA. RAC.	PLATANUS RACEMOSA	CALIFORNIA SYCAMORE	24" BOX	–	DOUBLE STAKE /HEIGHT 8–10' , SPREAD 3'–4' MIN.	M
	AES. CAL.	AESCULUS CALIFORNICA	CALIFORNIA BUCKEYE	15G./24"B.	–	DOUBLE STAKE / HGHT 7–8'/8–10',SPR. 2–3'/3'–4'MIN.	L
	QUE. AGR.	QUERCUS AGRIFOLIA	COAST LIVE OAK	15G./24"B.	–	DOUBLE STAKE / HGHT 7–8'/8–10',SPR. 2–3'/3'–4'MIN.	L
	PIN. TOR.	PINUS TORREYANA	TORREY PINE	15G./24"B.	–	DOUBLE STAKE / HGHT 7–8'/8–10',SPR. 2–3'/3'–4'MIN.	L
	SHRUBS:						
	BAC. P. 'P.P.'	BACCHARIS PILULARIS 'PIDGEON POINT'	PROSTRATE COYOTE BUSH	1 GAL	–	FULL & BUSHY @ 5' O.C.	L
	HES. PAR.	HESPERALOE PARVIFLORA	RED YUCCA	5 GAL	–	FULL & BUSHY @ 3' O.C.	L
	HET. ARB.	HETEROMELES ARBUTIFOLIA	TOYON	5 GAL	–	FULL & BUSHY @ 5' O.C.	L
	ANA. FLA.	ANAGOZANTHUS FLAVIDUS 'VELVET'	KANGAROO PAWS	1 GAL	–	FULL & BUSHY @ 3' O.C.	L
	MYO. PAR.	MYOPORUM PARVIFOLIUM	PROSTRATE MYOPORUM	1 GAL.	–	TRIANGULAR SPACING @ 5' O.C.	L
	LAV. S. 'O.Q.'	LAVANDULA STOECHAS 'OTTO QUAST'	SPANISH LAVENDER	5 GAL	–	FULL & BUSHY @ 3' O.C.	L
	LEU. FRU.	LEUCOPHYLLUM FRUTESCENS 'GR. CLOUD'	TEXAS RANGER	5 GAL	–	FULL & BUSHY @ 5' O.C.	L
	CAL. V. 'L.J.'	CALLISTEMON VIMINALIS 'LITTLE JOHN'	DWARF BOTTLE BRUSH	5 GAL	–	FULL & BUSHY @ 3' O.C.	L
	ROS. 'G.C. R.'	ROSA 'GREEN CARPET RED'	RED GREEN CARPET ROSE	5 GAL	–	FULL & BUSHY @ 3' O.C.	M
	SAL. GRE.	SALVIA GREGGI	AUTUMN SAGE	5 GAL	–	FULL & BUSHY @ 3' O.C.	L
	RHU. OVATA	RHUS OVATA	SUGAR BUSH	5 GAL	–	FULL & BUSHY @ 5' O.C.	L
	AGA. SHA.	AGAVE 'SHARKSKIN'	AGAVE	5 GAL	–	FULL & BUSHY @ 5' O.C.	L
	VINES:						
	FIC. REP.	FICUS REPENS	CREEPING FIG	5 GAL	–	ATTACH TO WALL	M
	LAWN:						
	FES. ARU.	FESTUCA ARUNDIACEA	WATERSAVER 2 FESCUE	SOD	AS REQ'D.	INSTALL PER SPECIFICATIONS	H
	MULCH & GROUNDCOVER:						
	WOOD MULCH	FOREST BLEND WOOD MULCH	MEDIUM GRIND WOOD MULCH	3" MAX.	AS REQ'D.	3" DEEP – INSTALL TO ALL PLANTING EXCEPT FUEL MODIFICATION AREAS	

MAJOR MONUMENT WALL

FARM MONUMENT WALL

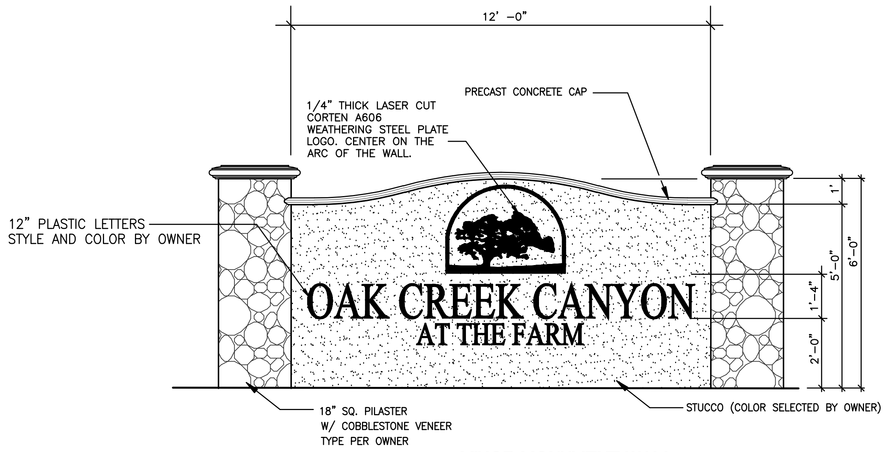

MINOR MONUMENT WALL

GRAPHIC SCALE

120 0 120 240 480

1 INCH = 120FT.

PREPARED FOR:

SUNBELT COMMUNITIES, LLC.
27127 CALLE ARROYO, SUITE 1910
SAN JUAN CAPISTRANO, CA 92675
PHONE: (949) 218-6023
CONTACT: BILL LO
JOB #11-127 10/18/12

ALHAMBRA GROUP
LANDSCAPE ARCHITECTURE
California license #2017
RECREATION FACILITIES PLANNING
41635 Enterprise Circle North, Suite C
Temecula, CA 92590 (951) 296-6802 FAX 296-6803
JOB # 11-127 1-06-13

OAK CREEK CANYON
CONCEPTUAL LANDSCAPE PLAN

L-1